


DPS (P&S) VERIFICATION JIG




As an optional extra, Geovista can supply a DPS verification jig.

This jig can be attached to the receiver section of the DPS probes and two different signals can be generated.

- Affix onto the receiver section as shown.
- Press Blue button = S Wave
- Press Red button = P wave
- Record a station measurement in the software to view the signal and verify the signal
- Holding down both buttons at the same time will switch off the jig.
- The jig will switch off after 5 minutes if left on.

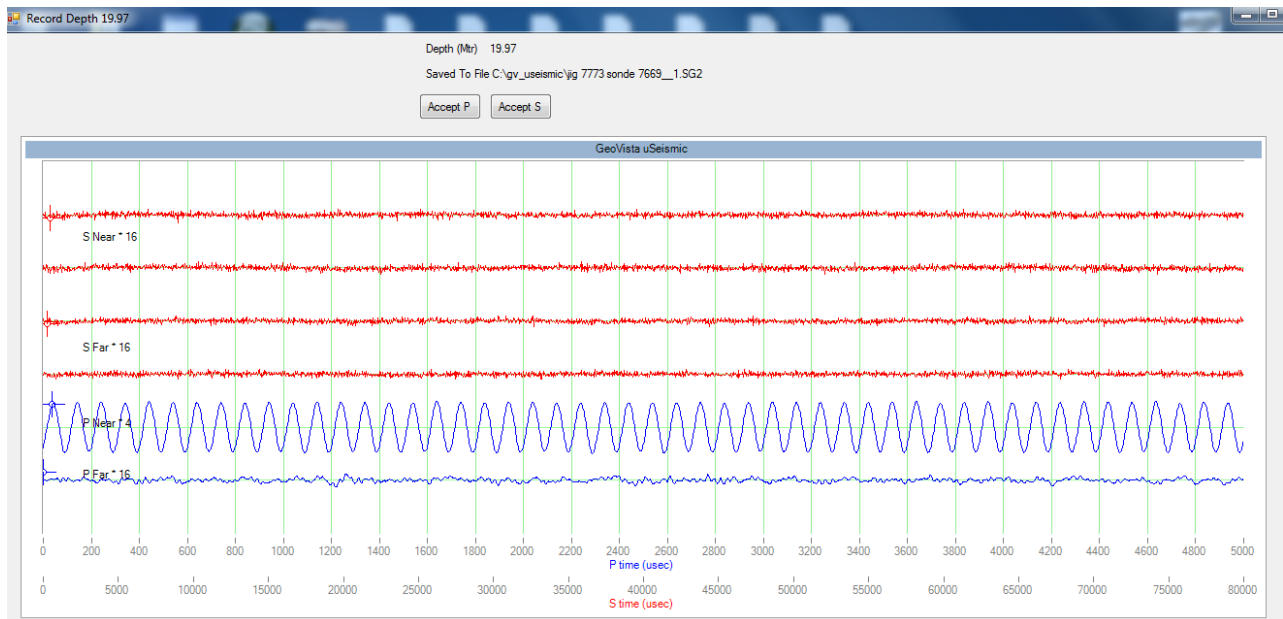

A P wave generated on the Near receiver

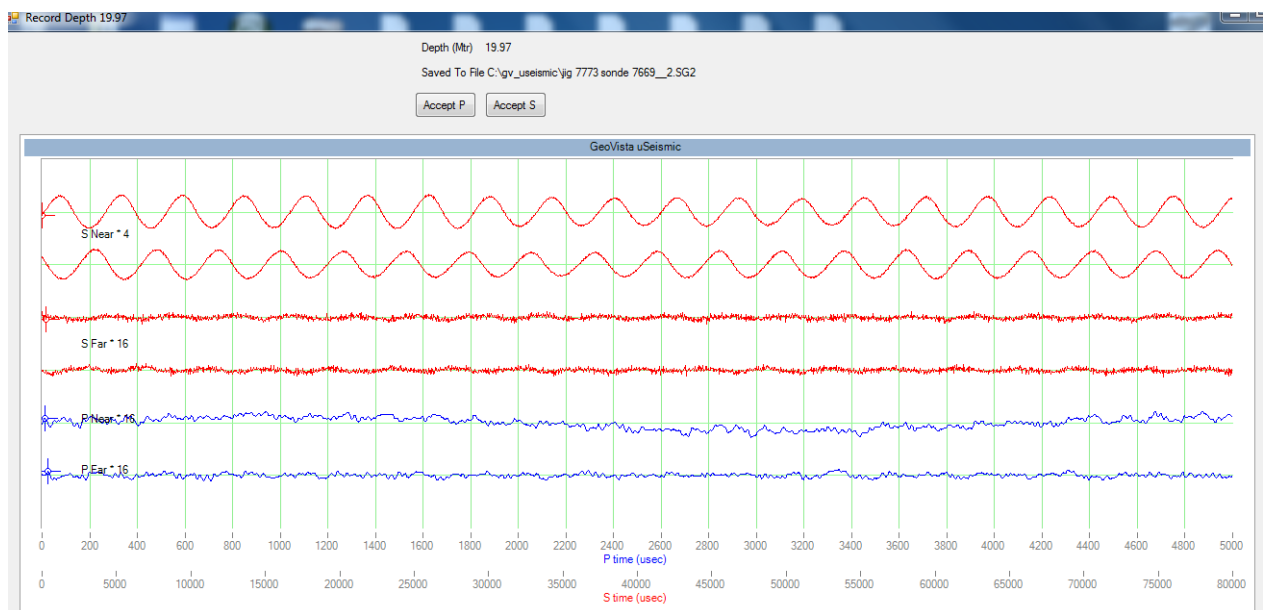

A S wave generated on the Near receiver