

## GV110 Junior – Manual Winch

Hand wound winch with capacity for up to 60m of 1/10" logging cable. Comes complete with slip ring, hand crank, adjustable manual brake and tripod with depth encoder. Weighs from 7.0 kg without cable.




## GV200 Portable Motorised Winch

Portable winch with optional 12Vdc or 240 V ac electric motor. Comes complete with depth encoder, cable tension gauge, automatic level-wind, variable speed and direction control, manual brake and emergency hand crank.



## GV500 Series Winches

High specifications winches with variable cable capacity. Comes with integral depth encoder, cable tension gauge, electronic torque limiter, automatic level-wind, variable speed and direction control, and emergency hand cranking facility. Supplied with remote wired or wireless auxiliary controller.

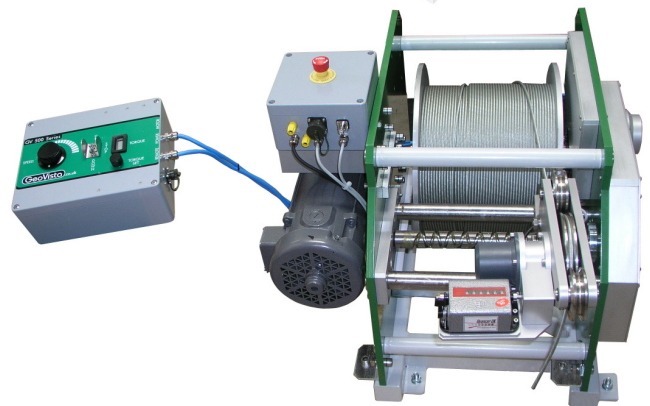

### Specifications:

	Model 212	Model 218
Capacity:	450m of 1/8" diam. cable	220m of 3/16" diam. cable
Speed:	0 to 15m/min max	0 to 15m/min max
Drive:	120W electric motor	120W electric motor
Power Supply:	12VDC or 240 V ac	12VDC or 240 V ac
Weight:	47 kg (without cable)	47 kg (without cable)
Dimensions:	540x 450 x 400 mm	540x 450 x 400 mm

	GV510	GV530	GV550	GV570
Cable Capacity:	600m - 3/16" 400m - 1/4" 1500m - 1/8"	1100m — 3/16" 600m - 1/4" 2500m - 1/8"	2100m — 3/16" 1100m - 1/4"	3000m — 3/16" 1900m - 1/4"
Speed:	0 to 27 m/min (max)	0 to 27m/min (max)	0 to 27 m/min (max)	0 to 27 m/min (max)
Motor Power:	0.37 KW	0.75KW	1.1 kW	1.5KW
Power Supply	220 VAC	220VAC	220VAC	220VAC
Weight:	85 Kg excl. cable	125 Kg excl. cable	186 Kg excl. cable	245 Kg excl. cable
Dimensions:	600x 596 x 495 mm	690x 606 x 560 mm	750x 795x 540 mm	810 x 938 x 590 mm

*Geovista reserve the right to change the products' list and specifications without prior notice*